



DICHTOMATIK

Flange seal FLAN89

DESCRIPTION



- Symmetrical
- Material: TPU

FUNCTION

- For SAE flanges in accordance with SAE J 518, among others
- Static sealing by axial compression in the installation space

PRODUCT ADVANTAGES

- Robust design
- Tolerance of higher surface roughness
- High wear resistance
- Low compression set
- Simple assembly
- High extrusion reliability
- Long service life
- Reliable design with broad application spectrum for moderately demanding applications in general industry
- Good price/performance ratio
- Manufactured by certified external suppliers

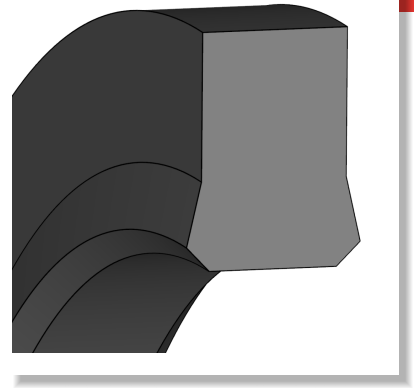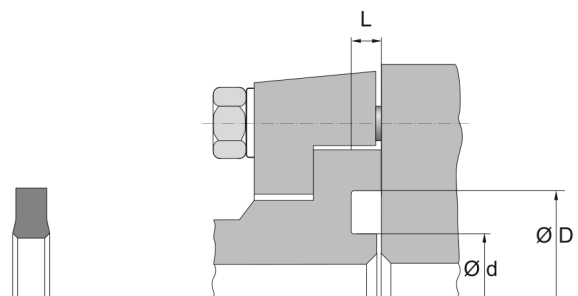

APPLICATIONS

- Mobile hydraulics
- Heavy hydraulics
- Use as a pipe flange or flange on valve blocks
- Replacement for SAE flanges in accordance with SAE J 518

APPLICATION LIMITS

- Temperature [°C]: -30 to 100
- Pressure [Mpa]: max. 40
- The values given here are maximum values and may not all be reached at the same time.

MEDIA RESISTANCE

- Hydraulic oils according to DIN 51524 part 1-3
- Lubricating oils
- Lubricating greases based on mineral oils
- Flame-retardant hydraulic fluids HFA, HFB, HFC according to VCMA 24317

CONFORMITY AND CERTIFICATES

- Please consult the material data sheet valid for the respective material for current information on approvals and certificates, as this information depends on the compound and cannot be listed exhaustively here.

DESIGN GUIDELINE

- Design of the radii R 0.4°
- Surface roughness of groove base $R_a \leq 0,4 \mu\text{m}$
- Surface roughness of mating surface $R_a \leq 3 \mu\text{m}$




DICHTOMATIK



DICHTOMATIK

Flange seal FLAN89

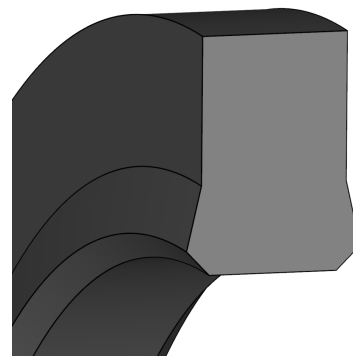

INSTALLATION GUIDELINE

- Installation in axially open groove
- Installation in axially open groove
- Installation space surface should be dry during installation

STORAGE ADVISE

- Storage temperature <25°C
- No direct heat sources
- No direct sunlight
- No condensation in the storage room
- No exposure to ozone or ionizing radiation
- Recommendations based on the revision of ISO 2230 dated 16.09.1992

The information contained herein is believed to be reliable, but no representations, warranties or guarantees of any kind are made as to its accuracy or suitability for any purpose. The information reproduced herein is based on laboratory testing and is not necessarily indicative of end product performance. Complete testing and performance of the end product is the responsibility of the user.

© Freudenberg FST GmbH | dichtomatik.fst.com



DICHTOMATIK



FREUDENBERG

SEALING TECHNOLOGIES